

Energy Safe Victoria Guide

Identifying mismatched d.c. connectors in PV installations

21 October 2020

Since July 2012 it has been a requirement within solar installations to only mate d.c. connectors of the same type from the same manufacturer.

AS/NZS 5033:2014 clause 4.3.7 Plugs, sockets and connectors

Plugs, sockets and connectors shall-

(k) only be mated with those of the same type from the same manufacturer

The current solar audit findings indicate either:

1. A misunderstanding within our industry to identify a mismatched d.c. connector, or
2. A blatant lack of care to ensure compliance to the minimum safety standards.

Installing or certifying a solar system with mismatched d.c. connectors is a breach against section 44(1)(a) of the *Electricity Safety Act 1998* (the Act). Enforcement action may be taken by Energy Safe Victoria (ESV) where a breach of the Act has been identified.

The result of a mismatched d.c. connector failing has the potential to cause major damage with a safety risk to occupants due to fire or smoke inhalation.

ESV developed this guide to assist all parties involved in installation, inspection and auditing of solar installations, to ensure compliance and safety requirements are met.

Why is it so important, what's the risk?

In 2019 [Solar Victoria's](#) audit program identified an alarming 30 per cent of PV systems installed in Victoria to contain mismatched d.c. connectors. In 2020 the Solar Victoria audits show a reduction in these non-compliances, but mismatched d.c. connectors were still found to be contained within 18-20 per cent of PV systems.

Investigations nationally show the cause of failure in many solar installations was the result of different brands of solar d.c. cable connectors mated together.

The connections had failed and the arcing of the d.c. cables started a fire within the PV systems. This problem was recently examined in ESV's [EnergySafe magazine Winter 2020 edition](#).

How can you identify mismatched d.c. connectors?


How can we ensure mismatched d.c. connectors are not mated together?

It can be difficult knowing the brands of connectors on the panel as they all look very similar. It is important to ask your supplier or check the panel spec sheet for the details of the connector.

For installers (Licensed Electrical Workers)

Ensure you use the same type from the same manufacturer, and ensure the manufacturer approved crimping tool is used for the connections.

Some failures have been found to have been caused by a poor cable crimp, either by a set of pliers or by a non-approved crimping tool. The right crimping tool will ensure the connection is crimped to the required pressure (Nm), as required by the manufacturer to ensure the connection is rated for the designed current carrying capacity.

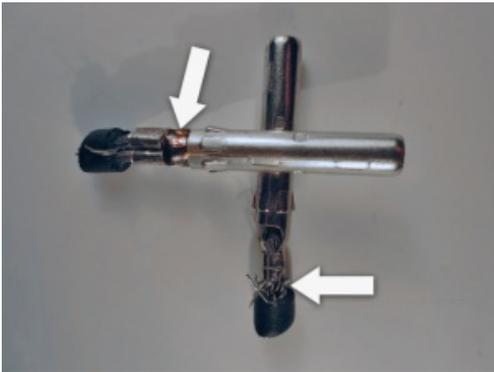

Poorly crimped connection



Result of a poor crimp under the array

D.c. connectors carry significant d.c. energy therefore it is very important crimping is done correctly. If there is a poor joint with a d.c. cable it can lead to arcing and as solar panels are energised by the sun it will keep arcing while the sun shines.

If your panel has different connectors than what you carry in your van, ask your supplier for some spare matching connectors. Don't risk it!

For Licensed Electrical Inspectors (LEI) / Auditors

Ideally you will find matching connectors from one PV panel to the next which have been fitted and supplied by the PV panel manufacturer.

Therefore as an inspector you are looking for the d.c. connectors that have been crimped and fitted to the cables by the installer. They will be located at the start of the return d.c. cable from the end of the PV array, or from a top PV array to a lower PV array, between split PV arrays, and at the DC Isolator. See Figure 1.

Note: you must also check d.c. connectors at the inverter.

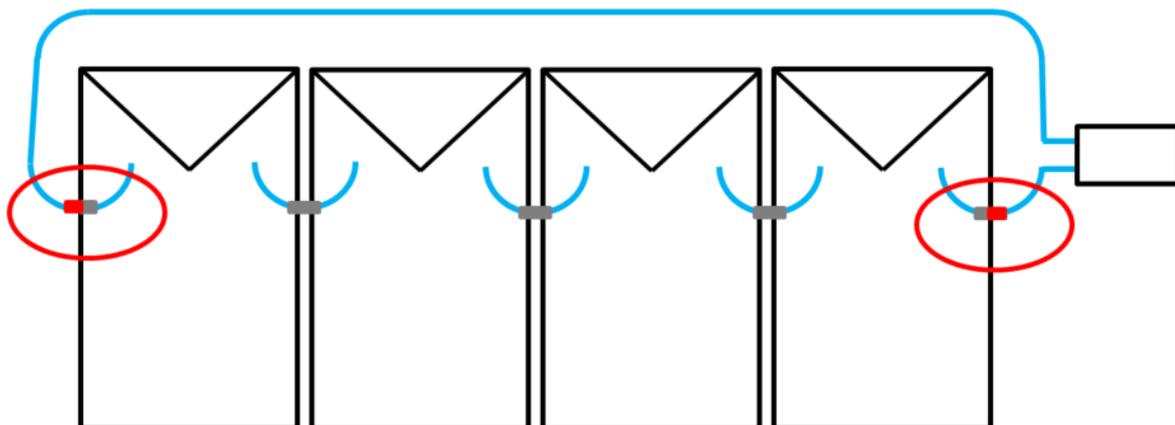


Figure 1

There is no need to remove PV modules as you should not dismantle the PV Array to conduct an inspection.

DC connectors

ESV has provided some tips on identifying different d.c. connectors:

1. Look at the 'O' ring on the male POS connector. Some have different colours, some have two 'O' rings. If the 'O' ring on your panel doesn't match the connector you are fitting, then it is probably a mismatched connector.
2. Look at the screw nut on the cable gland at the end of the connector. The shape varies from brand to brand, this may be an indicator of a mismatched connector.
3. Look at the contour of the body mouldings. Manufacturers use the same design on both the POS and NEG connectors, this is easily recognisable as a mismatched connector.
4. If in doubt, verify the connector by looking at the small manufacturers logo or symbol on the connector body, if they match you can be sure they are from the same manufacturer.

It is a clear requirement in the standard that only connectors of the same type from the same manufacturer can be mated together. Therefore it is the responsibility of the licensed person to ensure all connectors comply with this requirement.

Examples of different d.c. connectors



Red 'O' ring



Black 'O' ring




Logo 'TUV'




Logo MC4 brand


Examples of mismatched d.c. connectors

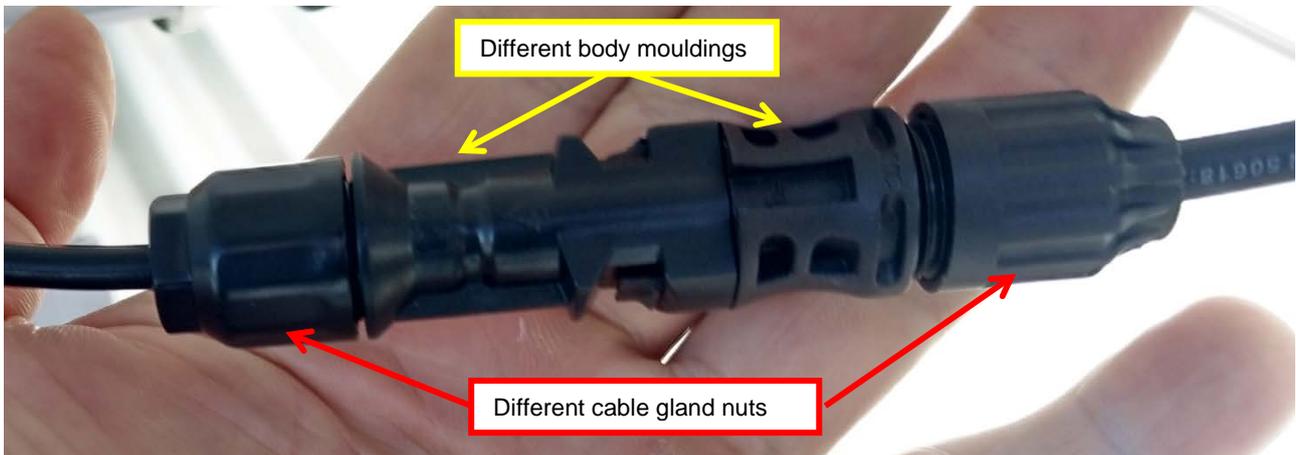

Examples of mismatched d.c. connectors (continued)

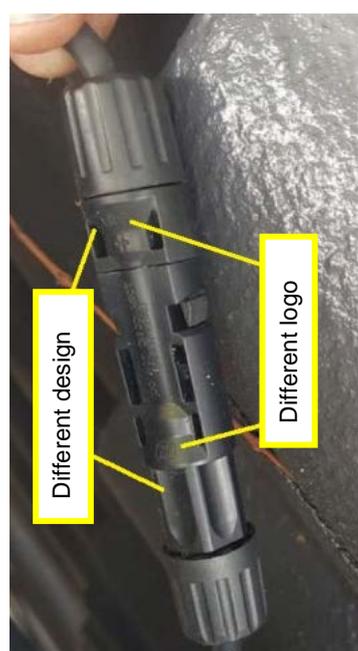

Example of a compliant, matching d.c. connector

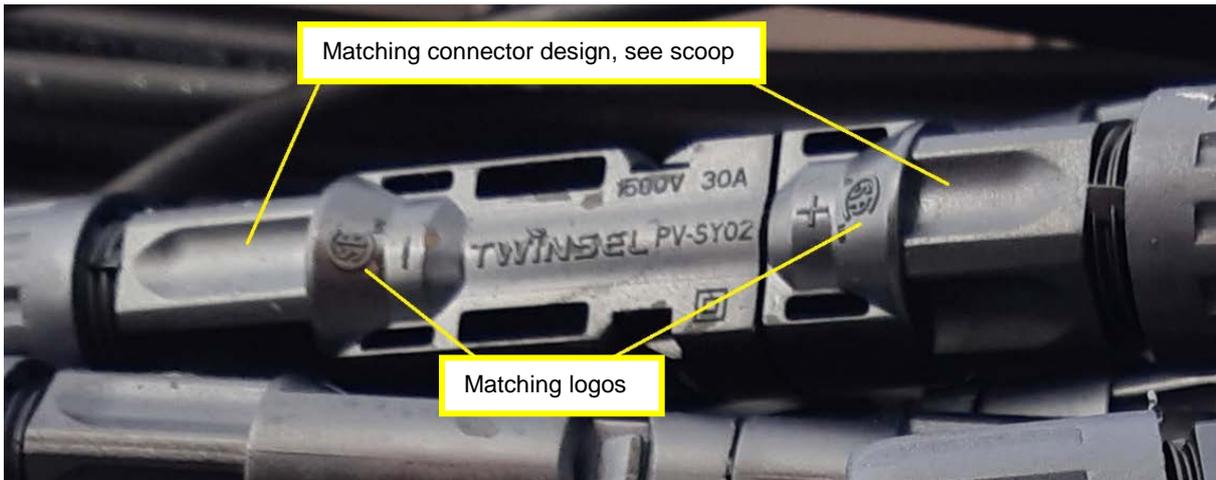

Exception to the rule

The only exception to this requirement is where a single manufacturer has designed, tested and declared that a specific type of connector they manufacture is compatible to be connected to another specific connector they manufacture.

The connector manufacturer Staubli has provided a declaration stating their d.c. connector brands MC4© and new version MC4-EVO2© have been designed and tested to be compatible for connection together.

Staubli instructions must be followed when mating these two connectors. The Staubli specifications state the MC4 has a maximum voltage of 1000 V DC whilst the MC4-EVO2 has a maximum voltage of 1500 V DC, the rated currents are the same. Therefore when used together the application must not exceed the lowest rated voltage of the connectors.



Who we are

We are Victoria's safety regulator for electricity, gas and pipelines.

Our role is to ensure that Victorian gas and electricity industries are safe and meet community expectations. We are also responsible for licensing and registering electricians, and educating the community about energy safety.

More information is available on the Energy Safe Victoria website: www.esv.vic.gov.au

Scott Beesley, ESV Compliance Officer, Renewable Energy
Electrical Installation Safety, Energy Safe Victoria